ISSN 2518-1491 (Online),
ISSN 2224-5286 (Print)

ҚАЗАҚСТАН РЕСПУБЛИКАСЫ
ҰЛТТЫҚ ҒЫЛЫМ АКАДЕМИЯСЫНЫҢ

Д.В.СОКОЛЬСКИЙ АТЫНДАҒЫ «ЖАНАРМАЙ,
КАТАЛИЗ ЖӘНЕ ЭЛЕКТРОХИМИЯ ИНСТИТУТЫ» АҚ

Х А Б А Р Л А Р Ы

ИЗВЕСТИЯ

НАЦИОНАЛЬНОЙ АКАДЕМИИ НАУК
РЕСПУБЛИКИ КАЗАХСТАН

АО «ИНСТИТУТ ТОПЛИВА, КАТАЛИЗА И
ЭЛЕКТРОХИМИИ ИМ. Д.В. СОКОЛЬСКОГО»

N E W S

OF THE ACADEMY OF SCIENCES
OF THE REPUBLIC OF KAZAKHSTAN

JSC «D.V. SOKOLSKY INSTITUTE OF FUEL,
CATALYSIS AND ELECTROCHEMISTRY»

ХИМИЯ ЖӘНЕ ТЕХНОЛОГИЯ СЕРИЯСЫ
♦
СЕРИЯ ХИМИИ И ТЕХНОЛОГИИ
♦
SERIES CHEMISTRY AND TECHNOLOGY

5 (431)

ҚЫРКҮЙЕК – ҚАЗАН 2018 ж.
СЕНТЯБРЬ – ОКТЯБРЬ 2018 г.
SEPTEMBER – OCTOBER 2018

1947 ЖЫЛДЫҢ ҚАҢТАР АЙЫНАН ШЫҒА БАСТАҒАН
ИЗДАЕТСЯ С ЯНВАРЯ 1947 ГОДА
PUBLISHED SINCE JANUARY 1947

ЖЫЛЫНА 6 РЕТ ШЫҒАДЫ
ВЫХОДИТ 6 РАЗ В ГОД
PUBLISHED 6 TIMES A YEAR

АЛМАТЫ, ҚР ҰҒА АЛМАТЫ, НАН РК ALMATY, NAS RK

NAS RK is pleased to announce that News of NAS RK. Series of chemistry and technologies scientific journal has been accepted for indexing in the Emerging Sources Citation Index, a new edition of Web of Science. Content in this index is under consideration by Clarivate Analytics to be accepted in the Science Citation Index Expanded, the Social Sciences Citation Index, and the Arts & Humanities Citation Index. The quality and depth of content Web of Science offers to researchers, authors, publishers, and institutions sets it apart from other research databases. The inclusion of News of NAS RK. Series of chemistry and technologies in the Emerging Sources Citation Index demonstrates our dedication to providing the most relevant and influential content of chemical sciences to our community.

Қазақстан Республикасы Ұлттық ғылым академиясы "ҚР ҰҒА Хабарлары. Химия және технология сериясы" ғылыми журналының Web of Science-тің жаңаланған нұсқасы Emerging Sources Citation Index-те индекстелуге қабылданғанын хабарлайды. Бұл индекстелу барысында Clarivate Analytics компаниясы журналды одан әрі the Science Citation Index Expanded, the Social Sciences Citation Index және the Arts & Humanities Citation Index-ке қабылдау мәселесін қарастыруда. Webof Science зерттеушілер, авторлар, баспашылар мен мекемелерге контент тереңдігі мен сапасын ұсынады. ҚР ҰҒА Хабарлары. Химия және технология сериясы Emerging Sources Citation Index-ке енуі біздің қоғамдастық үшін ең өзекті және беделді химиялық ғылымдар бойынша контентке адалдығымызды білдіреді.

НАН РК сообщает, что научный журнал «Известия НАН РК. Серия химии и технологий» был принят для индексирования в Emerging Sources Citation Index, обновленной версии Web of Science. Содержание в этом индексировании находится в стадии рассмотрения компанией Clarivate Analytics для дальнейшего принятия журнала в the Science Citation Index Expanded, the Social Sciences Citation Index и the Arts & Humanities Citation Index. Web of Science предлагает качество и глубину контента для исследователей, авторов, издателей и учреждений. Включение Известия НАН РК в Emerging Sources Citation Index демонстрирует нашу приверженность к наиболее актуальному и влиятельному контенту по химическим наукам для нашего сообщества.

«ҚР ҰҒА Хабарлары. Химия және технология сериясы».
ISSN 2518-1491 (Online),
ISSN 2224-5286 (Print)
Меншіктенуші: «Қазақстан Республикасының Ұлттық ғылым академиясы» Республикалық қоғамдық бірлестігі (Алматы қ.)
Қазақстан республикасының Мәдениет пен ақпарат министрлігінің Ақпарат және мұрағат комитетінде 30.04.2010 ж. берілген **№1089-Ж** мерзімдік басылым тіркеуіне қойылу туралы куәлік

Мерзімділігі: жылына 6 рет.
Тиражы: 300 дана.

Редакцияның мекенжайы: 050010, Алматы қ., Шевченко көш., 28, 219 бөл., 220, тел.: 272-13-19, 272-13-18,
www:nauka-nanrk.kz / chemistry-technology.kz

Типографияның мекенжайы: «Аруна» ЖК, Алматы қ., Муратбаева көш., 75.

«Известия НАН РК. Серия химии и технологии».
ISSN 2518-1491 (Online),
ISSN 2224-5286 (Print)
Собственник: Республиканское общественное объединение «Национальная академия наук Республики Казахстан» (г. Алматы)
Свидетельство о постановке на учет периодического печатного издания в Комитете информации и архивов Министерства культуры и информации Республики Казахстан **№10893-Ж,** выданное 30.04.2010 г.

Периодичность: 6 раз в год
Тираж: 300 экземпляров

Адрес редакции: 050010, г. Алматы, ул. Шевченко, 28, ком. 219, 220, тел. 272-13-19, 272-13-18,
http://nauka-nanrk.kz / chemistry-technology.kz

Адрес редакции: 050100, г. Алматы, ул. Кунаева, 142,
Институт органического катализа и электрохимии им. Д. В. Сокольского,
каб. 310, тел. 291-62-80, факс 291-57-22, e-mail:orgcat@nursat.kz
Адрес типографии: ИП «Аруна», г. Алматы, ул. Муратбаева, 75

News of the National Academy of Sciences of the Republic of Kazakhstan. Series of chemistry and technology.
ISSN 2518-1491 (Online),
ISSN 2224-5286 (Print)
Owner: RPA "National Academy of Sciences of the Republic of Kazakhstan" (Almaty)
The certificate of registration of a periodic printed publication in the Committee of Information and Archives of the Ministry of Culture and Information of the Republic of Kazakhstan N 10893-Ж, issued 30.04.2010

Periodicity: 6 times a year
Circulation: 300 copies

Editorial address: 28, Shevchenko str., of. 219, 220, Almaty, 050010, tel. 272-13-19, 272-13-18,
http://nauka-nanrk.kz / chemistry-technology.kz

Editorial address: Institute of Organic Catalysis and Electrochemistry named after D. V. Sokolsky
142, Kunayev str., of. 310, Almaty, 050100, tel. 291-62-80, fax 291-57-22,
e-mail: orgcat@nursat.kz

Address of printing house: ST "Aruna", 75, Muratbayev str, Almaty

N E W S
OF THE NATIONAL ACADEMY OF SCIENCES OF THE REPUBLIC OF KAZAKHSTAN
SERIES CHEMISTRY AND TECHNOLOGY
ISSN 2224-5286 **https://doi.org/10.32014/2018. 2518-1491.11**
Volume 5, Number 431 (2018), 82 – 91

UDC 502.174.1

Ye.V. Apimakh[1], A.E. Leudanski[1], A.A. Volnenko[2], D.K. Zhumadullaev[2]

[1]Belarusian State Technological University, Minsk city, Belarus
[2] M. Auezov South Kazakhstan State University, Shymkent city, Kazakhstan
e.mail: nii_mm@mail.ru

METHODS OF CARRYING OUT FLOTATION PROCESSES

Abstract. Within the scope of work on separation of polymer waste by the flotation method, there has been made a review of methods for carrying out flotation processes and the equipment used. There have been considered the existing schemes for classification of flotation processes by objects, interfacial boundaries, design features of flotators, aeration method, technological purpose, and there has been done the analysis of the completeness of accounting for all characteristic features.

Based on the analysis done, there has been suggested the classification of flotation processes by the following types: extraction of the valuable (target) component, type of the raw material, type of devices, process mode in the apparatus, interfacial surfaces. Among the methods of flotation separation on interfacial surfaces, the phase foam flotation is most widely presented in the industry. By the method of feeding gas to the liquid, flotation is divided into pneumatic, pneumomechanical, cascade, ejector, vacuum, pressure, electrical, reagent and thermal.

Flotation devices are also proposed to be classified by type into trough (direct flow), chamber (cascade) and column (tank) ones.

When choosing the most suitable flotation method for a particular task, it is necessary to take into account all types of flotation and know the features, advantages and disadvantages of each of them. The suggested scheme for classification of flotation processes lets us systematize and characterize completely most of the existing flotation processes.

Keywords: flotation, classification, raw materials, concentrate, target component, process mode, interfacial surface, aeration, equipment.

Introduction. Flotation as a method of mineral concentration is known since the 19th century. The English inventor William Haynes was the first who patented the use of oil flotation on February 23, 1860 [1]. Flotation varies by objects, interfacial boundaries, design features of flotators, aeration method, technological purposeand other characteristics [2–5].

Recently, the flotation process on the basis of various wettability is used to sort plastics. It is very promising because of the simplicity of hardware design and reliability in operation. It can be used to separate plastics with fairly close or equal densities. This requires the presence of surfactants and gas bubbles in the working volume of the device.

The purpose of this article is to review the methods of carrying out flotation processes and the equipment used, as well as to develop the flotation process classification scheme, ensuring the completeness of accounting for all characteristic features.

Study methods. Each of the considered methods of carrying out the flotation process has its own specific features of carrying out the studies.

Study results.

In the existing literary sources, there is a description of flotation types only by separate features. In the mining encyclopedia [6] there is a flotation process classification scheme, shown in figure 1. But it also does not contain a complete list of features and is difficult for perception.

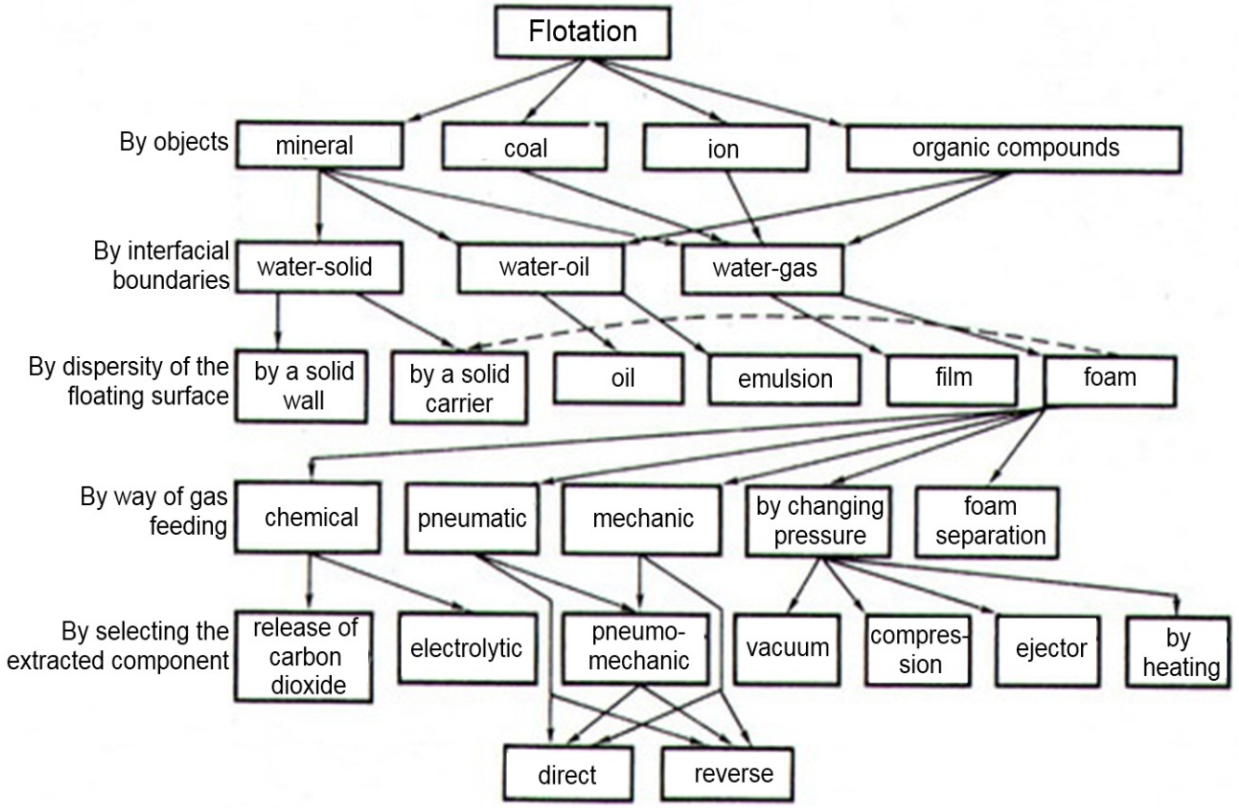

Figure 1 –Classification of flotation

Therefore, based on the literature data on flotation methods and their hardware design, the authors proposed the most complete scheme for classification of existing flotation processes, shown in figure 2.

The proposed scheme includes the following types of classification. By the extraction of a valuable (target) component, flotation can be direct or reverse; selective or collective. ***Direct*** flotation is an operation, in which the extracted useful material is concentrated in foam [7-9]. If during flotation the gangue is extracted into the foam and the concentrate is a chamber product, such flotation is called ***reverse*** [10, 11].

During the flotation of ores with obtaining several concentrates, depending on the order of separation of valuable components, there are distinguished selective and collective types of flotation. At the beginning of flotation process development, there was used only separation of gangue and target components, extracted into a collective (generic) concentrate with its following separation. Such flotation is called ***collective.*** Later on, there were developed the methods of separation into several products with the release of valuable components into various concentrates– so there appeared the ***selective*** flotation [12, 13].

Depending on the type of extracted material, flotation is divided into ***organic*** [10, 14, 15], ***mineral*** [16] and ***ion*** [17–20].

Flotation separation is carried out on the following phase interfaces:

– liquid-liquid (oil and emulsion flotation);

- liquid-gas (film and foam flotation);

– liquid-solid (coagulation and flotation with a carrier).

Oil flotation consists in different wetting of separated particles by immiscible liquids, dispersed in water in the form of small drops [15]. As a result, there are formed "particle – oil" complexes, floating to the surface. In Mariupol (1904) such a process was applied for the purpose of graphite ore concentration. Subsequently, this method was improved: the oil was dispersed to ***an emulsion***, which made it possible to extract fine tailings [21].

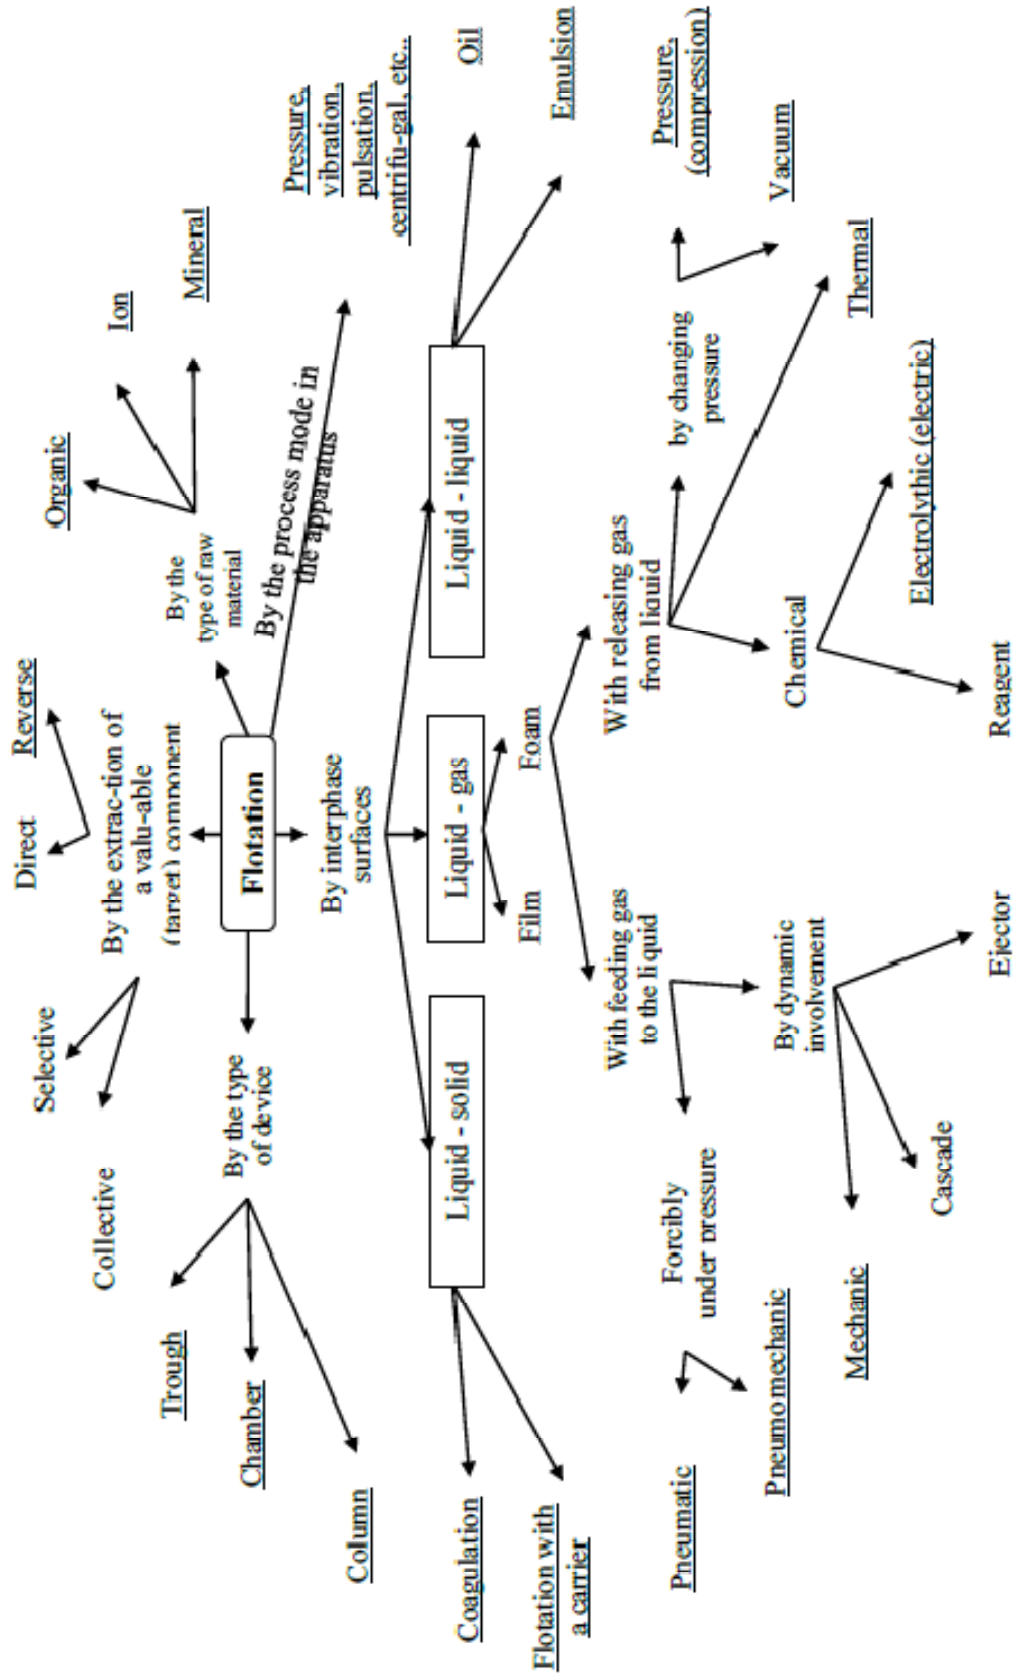

Figure 2 – Classification of flotation

During ***film*** flotation, the separated particles are poured from a certain height to the surface of the working fluid [22-25]. Non-wetted particles are kept on its surface and separated as a concentrate, while those wetted with water – sink and get into another product.

Oil and film flotation have low efficiency. Foam flotation is most widely presented in the industry.

Foam flotation is carried out in a three–phase medium "particles –liquid-gas", which contains flotation reagents. The flotation principle is as follows. In an aqueous medium, the gas bubble and the particle's hydrophobic surface, the adhesion (adherence) of which to liquid is less than the cohesion (repulsion) of liquid, come together. The water layer, separating them, reaches a certain thickness, at which it becomes unstable and spontaneously breaks. Then the particle and the bubble stick together. Due to the fact that the density of "bubble-particle" complexes is less than the density of liquid, they float to its surface and form a foam product that is withdrawn from the flotation machine. Wetted particles do not adhere to the bubbles, remaining in the volume of liquid, or settle to the bottom [26, 27]. This method was first patented by brothers Arthur and Adolf Bessel (Germany, 1877).) [28].

The foam layer can be formed in two ways - when feeding gas to the liquid or when gas being released from the liquid. Gas is fed to the liquid either forcedly under pressure (pneumatic and pneumomechanical flotation), or with dynamic involvement (mechanical, cascade, ejector flotation).

By the method of feeding gas to the liquid, as a defining feature of classification of flotation machines, there are distinguished the following methods of flotation [4]:

– ***pneumatic*** – flotation by gas bubbles, appearing, when gas is passed through porous aerators (branch pipes, filters, porous plates, caps, etc.)[29, 30];

– ***pneumomechanical*** – flotation by bubbles, formed during dispersion of the compressed gas, fed by mechanical agitators [31];

– ***mechanical*** – flotation by bubbles, drawn into the liquid from atmosphere, with intensive mixing of liquid by various agitators [31, 32, 33];

– ***cascade*** – flotation by bubbles, drawn into liquid from atmosphere as a result of the jet of the same liquid, falling into it from a certain height [34];

– ***ejector***– flotation by bubbles, drawn into liquid from atmosphere as a result of the flow of a jet of the same liquid at a high speed in a tube with a narrowing and air access gap [35, 36, 37].

Gas is separated from the liquid thermally, chemically (reagent or electroflotation) and by changing the pressure (pressure, vacuum):

– ***vacuum*** – flotation by gas bubbles, dissolved in the liquid, which are released under vacuum [38, 39];

– ***pressure*** (compression) – flotation by bubbles, released at atmospheric pressure from oversaturated under pressure solutions of gases in the liquid [40, 41];

– ***electroflotation*** – flotation by bubbles, arising in electrolysis, usually on the cathode [42, 43];

– ***reagent*** – flotation by bubbles, which are obtained as a result of the influence of acids or alkalis on the liquid;

– ***thermal*** – flotation by bubbles, released from the liquid as a result of its heating above the boiling point of the liquid, oversaturated with gas.

Reagent and thermal methods of flotation are very expensive and recently do not find a wide practical application. There are also combined methods of flotation, in which the liquid is aerated in several ways [44–46].

In machines of ***mechanical***type, air from the atmosphere is sucked due to the mechanical action of the mixer-aerator blades on the pulp. Strong mixing in the chamber creates the pulp turbulent flows in it. The pulp has a horizontal circular motion around the impeller shaft and a vertical circulation. Large air bubbles, trapped in the working fluid, are broken by a stirrer and pulp flows into small bubbles. Mechanical floatation is characterized by a variability of air suction with time, high power consumption, strong agitation of the pulp.

The specific feature of ***pneumomechanical*** flotation devices is that in such devices the impeller rotates only to hold the particles in suspended state and to disperse the air, supplied to the device from the blower, which makes it possible, in comparison with mechanical flotation devices, to ensure constant air flow in the device regardless of the wear of aerators. With this method, strong mixing of the pulp is carried out too.

Pneumatic flotation is characterized by the design simplicity, low cost (no impellers, pumps are needed). However, it is characterized by frequent clogging of aerator holes, the difficulty of uniform aeration. The efficiency of pneumatic flotation depends on the holes and material of the aerator, pressure and air flow, duration of the process, depth of liquid in the apparatus [47]. The low efficiency of separation is determined by the fact that when air is supplied through aerators, there are appearing large bubbles (1–3 mm) [48]. However, currently there are developed the aerators, providing a fine aeration (up to 0.3 mm). With such aerators there are equipped modern flotation devices with pneumatic aeration [49], and their use in pneumatic flotators increases the efficiency.

Gas separation from the solution with changing the pressure is applied for liquids that contain very small particles. This possibility was grounded by Klassen [50]. In this case, bubbles appear on the surface of the particles. This is done, in accordance with Henry's law, by reducing the solubility of gas in liquids with a decrease in pressure. The essence of the method is in formation of an oversaturated gas solution in the liquid. When pressure is released, from the solution there begin to separate the gas bubbles, which float hydrophobic particles. There are distinguished vacuum and pressure types of flotation.

By the method of ***vacuum*** flotation, the liquid under atmospheric pressure is saturated with air in the aeration chamber, and then transferred to the flotation unit, where the vacuum pump maintains the vacuum of 30-40 kPa. The bubbles released in this case float part of the dispersed particles to the surface. The advantages of vacuum flotation are that the process is carried out in a still medium, the possibility of destruction of flotation complexes is minimal and energy costs are low. The disadvantages of vacuum flotation include a limited by small pressure difference amount of liquid saturation with gas. This limits its application to separation of suspended particles with a concentration of up to 0.3 kg/m^3. One more disadvantage of vacuum flotation is the presence of sealed reservoirs with scraper mechanisms, which causes certain structural and operational difficulties.

Pressure flotation devices are more common than vacuum ones. Pressure flotation makes it possible to separate the material with a concentration of suspensions in liquid up to 5 kg/m^3. They are simple and reliable in operation. The saturation of liquid with gas occurs at elevated pressures in pressure tanks. The flotation unit operates at atmospheric pressure in this case. The solubility of gas in it decreases, and in the entire volume there are released the bubbles, which collide with the particles and float them.

Electroflotation is a process of separation of particles, suspended in liquid, by gas bubbles of hydrogen and oxygen, released during electrolysis. This method has distinctive features, which at the same time are its advantages. During electrolysis the finely dispersed gases are released [51, 52]. The bubbles of electrolysis gases are the same in size, they are little inclined to coalescence and during their residence in liquid they retain their diameters.

Electroflotation is a complex hydro-mechanical and electrochemical process. The speed and efficiency of this process is significantly influenced by the density of the electric current. The most serious drawback of the electroflotation separation method is that as electricity passes through the liquid, salt deposits occur on the electrodes, which can provoke a complete stop of the process. The electrodes work more effectively in an acidic medium. Uneven gas release on the electrodes leads to the concentration of bubbles in certain areas of the flotation device. Because of this, it produces the undesirable circulation of liquid [53, 54].

The process of electro-flotation, apparently, will not receive widespread adoption in large-tonnage production. This is primarily due to the low performance of electric flotators, as well as their instability, caused by the latch-up of the interelectrode area [55, 56].

Flotation devices are also classified by type to trough (direct-flow), chamber (cascade) and column (tank).

Flotation devices of a ***trough*** type have a form of a bath, stretched in length. The working fluid is supplied from one side and goes out on the other side together with the sludge. The foam is taken along the entire length through the side boards into the troughs (usually by gravity). The height of the working fluid is regulated by the intensity of discharge.

Chamber [57] flotation devices consist of separate chambers, with one or more aerators used in each of them. Among the features of chamber machines there are: the need to adjust the height of the working fluid in each chamber; lowering the level of the working fluid along the machine, due to which in each chamber there are different heights of foam threshold and foam scraper blades.

Flotation apparatuses of ***column*** type [2, 58-81] are vertical tanks of different sections (round, elliptical or rectangular). The foam product is removed from the top and the sediment - from the bottom of the column. Power is supplied most often to the middle part of the column.

Flotation in the column apparatus is carried out with the counter-current movement of the bubbles and the working fluid. The liquid is discharged through the discharge pipe at the bottom of the column, and bubbles float towards it. On the surface of liquid they form the foam, which is withdrawn at the top of the column. The speed of the working fluid should be less than the relative speed (float) of the bubbles. The high velocity of liquid can result in the accumulation of bubbles, their coalescence and the release of gas locks.

The flotation column is smaller in size than other flotation units of the same capacity; it is generally free of moving parts, which reduces the energy consumption and maintenance costs. The main difficulties, arising during the operation of column apparatus are associated with clogging of aerators [81].

Chamber machines can be of mechanical and pneumomechanical types, trough machines – of any other types, column machines - of a pneumatic type only.

The mode of motion of bubbles and particles is a significant factor, affecting the possibility of flotation complex formation, flotation intensity and energy consumption of the process. The probability of collision of a bubble and a particle, as well as the formation of a flotation complex depends on the relative speed of their movement, the duration of contact and the forces of inertia. By the mode of movement of phases in the machine, flotation is also divided into numerous types: pressure, vibration, pulsation, centrifugal, etc. In this work we'll consider only those modes of movement of phases, which are most commonly found in the basic designs of flotation machines.

In mechanical and pneumomechanical machines the nature of liquid and solid phases' motion is similar to perfect mixing. This is necessary to maintain the suspension in a suspended state, to disperse the bubbles and increase the time they stay in the working volume of the apparatus. However, intensive mixing can cause the destruction of the bubble – particle complex due to the inertia forces, especially during the flotation of large particles [2]. In addition, the use of the impeller reduces the efficiency of the flotation unit, since a significant part of the energy is used to maintain the working medium in a suspended state, which is not directly related to the flotation process.

The counter-flow of the working fluid and bubbles in the column apparatus reduces the speed of the constrained (group) motion of bubbles, which increases their residence time in the working fluid, the efficiency of gas use and the specific productivity of the flotator. In the column, the forces of inertia are insignificant due to the absence of mechanical devices and low turbulence of flows.

As it can be seen from the listed types, flotation is a complex and multi-faceted process. When choosing the most suitable method of flotation for a particular task, it is necessary to take into account all types of flotation and know the features, advantages and disadvantages of each of them. The suggested scheme for classification of flotation methods lets us systematize and characterize completely most of the existing flotation processes.

Conclusions. There have been made a review and analysis of methods for carrying out flotation processes and the equipment used. The existing schemes of classification of flotation processes do not contain a complete list of features and are difficult for perception.

There has been suggested the classification of flotation processes, the main components of which are the methods of extraction of a valuable (target) component, the type of raw materials, the type of devices used, the process modes in the apparatus, the interfacial surfaces used. The suggested scheme for classification of flotation methods lets us systematize and characterize completely most of the existing flotation processes.

Foam flotation is noted as a method, most widely used in the industry. There have been considered the designs of flotation machines.

REFERENCES

[1] Woodcroft B. Chronological Index of Patents Applied for and Patents Granted, For the Year 1860. London : Great Seal Patent Office, **1861**. P. 34.

[2] Pennaja separacija i kolonnaja flotacija / Ju.I. Rubinshtejn [i dr.]. M.: Nedra, **1989**. 303 s.

[3] Teorija i tehnologija flotacii rud / O. S. Bogdanov [i dr.] ; pod obshh. red. O. S. Bogdanova. M. : Nedra, **1980**. 432 s.

[4] Meshherjakov, N. F. Flotacionnye mashiny i apparaty / N.F. Meshherjakov. – 2-e izd., pererab. i dop. – M. : Nedra, **1982** – 200 s.

[5] Various flotation techniques for metal ions removal / Eleni A. Deliyanni, George Z. Kyzas, Kostas A. Matis // Journal of Molecular Liquids. – **2017**. – Vol. 225. – P. 260–264.

[6] Gornaja jenciklopedija. / Gl. red. E.A. Kozlovskij. Red.kol.: M.I. Agoshkov, L.K. Antonenko, K.K. Arbiev i dr. – M.: Sov. Jenciklopedija, **1991**. – T.5.– S. 322.

[7] Pilot Scale Direct Flotation of a Phosphate Ore with Silicate-Carbonate Gangue / Rodrigo O. Albuquerque, Antonio E.C. Peres, José A. Aquino, Plinio E. Praes, Carlos A. Pereira // Procedia Engineering. – **2012**. – Vol. 46. – P. 105–110.

[8] Effects of different factors during the de-silication of diaspore by direct flotation / Gen Huang, Changchun Zhou, Jiongtian Liu // International Journal of Mining Science and Technology. – **2012**. – Vol. 22, Issue 3. – P. 341–344.

[9] Vanadium recovery from stone coal through roasting and flotation / Chun Liu, Yi-min Zhang, Shen-xu Bao // Transactions of Nonferrous Metals Society of China. – **2017**. – Vol. 27, Issue 1. – P. 197–203.

[10] An overview of reverse flotation process for coal / Soni Jaiswal, Sunil Kumar Tripathy, P.K. Banerjee // International Journal of Mineral Processing. – **2015**. – Vol. 134. – P. 97–110.

[11] Study of reverse flotation of calcite from scheelite in acidic media / Rongdong Deng, Yuqing Huang, Yuan Hu, Jiangang Ku, Weiran Zuo, Wanzhong Yin // Applied Surface Science. – **2018**. – Vol. 439. – P. 139–147.

[12] Selective flotation of smithsonite, quartz and calcite using alkyl diamine ether as collector / Hai-ling Zhu, Wen-qing Qin, Chen Chen, Li-yuan Chai, Lai-shun Li, San-jun Liu, Ting Zhang // Transactions of Nonferrous Metals Society of China. – **2018**. – Vol. 28, Issue 1. – P. 163–168.

[13] Selective flotation separation of molybdenite and talc by humic substances / Duowei Yuan, Lei Xie, Xingwei Shi, Longsheng Yi, Guofan Zhang, Hao Zhang, Qi Liu, Hongbo Zeng // Minerals Engineering. – **2018**. – Vol. 117. – P. 34–41.

[14] Handbook of Flotation Reagents: Chemistry, Theory and Practice / Srdjan M. Bulatovic. – Amsterdam, **2015**. – 226p.

[15] Oily bubble flotation technology combining modeling and optimization of parameters for enhancement of flotation of low-flame coal / Songjiang Chen, Lulu Li, Jinzhou Qu, Quanzhou Liu, Longfei Tang, Xiuxiang Tao, Huidong Fan // Powder Technology. – **2018**. – Vol. 335. – P. 171–185.

[16] Some physicochemical aspects of water-soluble mineral flotation / Zhijian Wu, Xuming Wang, Haining Liu, Huifang Zhang, Jan D. Miller // Advances in Colloid and Interface Science. – **2016**. – Vol. 235. – P. 190–200.

[17] C. Micheau, A. Schneider, L. Girard, P. Bauduin, Evaluation of ion separation coefficients by foam flotation using a carboxylate surfactant, Colloid Surf. A., 470 (**2015**) 52-59.

[18] F.S. Hoseinian, M. Irannajad, A.J. Nooshabadi, Ion flotation for removal of Ni(II) and Zn(II) ions from wastewaters, International Journal of Mineral Processing, 143 (**2015**) 131-137.

[19] A.I. Zouboulis, K.A. Matis, Removal of metal ions from dilute solutions by sorptive flotation, Crit. Rev. Environ. Sci. Technol., 27 (1997) 195-235.

[20] K.A. Matis, A.I. Zouboulis, N.K. Lazaridis, I.C. Hancock, Sorptive flotation for metal ions recovery, International Journal of Mineral Processing, 70 (**2003**) 99-108.

[21] J. Choi, E. Lee, S.Q. Choi, S. Lee, Y. Han, H. Kim, Arsenic removal from contaminated soils for recycling via oil agglomerate flotation, Chem. Eng. J., 285 (**2016**) 207-217.

[22] Critical fall height for particle capture in film flotation: Importance of three phase contact line velocity and dynamic contact angle / Dongmei Liu, Geoffrey Evans, Qinglin He // Chemical Engineering Research and Design. – **2016**. – Vol. 114. – P. 52–59.

[23] Bi-wetting property of oil sands fine solids determined by film flotation and water vapor adsorption / Cheng Wang, Qi Liu, Douglas G. Ivey, Thomas H. Etsell // Fuel. – **2017**. – Vol. 197. – P. 326–333.

[24] Effects of elctrolytes on the stability of wetting films: Implications on seawater flotation / Lei Pan, Roe-Hoan Yoon // Minerals Engineering. – **2018**. – Vol. 122. – P. 1–9.

[25] Evaluation of the influence of flotation reagents on the hydrophobicity of coal using the film flotation method / Jerzy Sablik, Krzysztof Wierzchowski //Fuel. – **1922**. – Vol. 71, Issue 4. – P. 474–475.

[26] The joint action of saline water and flotation reagents in stabilizing froth in coal flotation / T. Wei, Y. Peng, S. Vink // International Journal of Mineral Processing. – **2016**. – Vol. 148. – P. 15–22.

[27] Kinetics of froth flotation of naturally hydrophobic solids with different shapes / Sabina Szczerkowska, Agata Wiertel-Pochopien, Jan Zawala, Erik Larsen, Przemyslaw B. Kowalczuk // Minerals Engineering. – 2018. – Vol. 121. – P. 90–99.

[28] Hoover T.J. Concentrating ores by flotation. – 3-rd ed. // The Mining Magazine. – London, **1916**. – 320 p.

[29] Efficient removal of perfluorooctane sulfonate from aqueous film-forming foam solution by aeration-foam collection / Pingping Meng, Shubo Deng, Ayiguli Maimaiti, Bin Wang, Jun Huang, Yujue Wang, Ian T. Cousins, Gang Yu // Chemosphere. – **2018**. – Vol. 203. – P. 263–270.

[30] Flotation kinetics of coal in the Inflatable Cyclonic Flotation Column / Ningbo Li, Yanfeng Li, Xiaoqing Fu, Fuliang Gao, Chiqiang Zhang, Wencheng Xia, Long Liang // Powder Technology. – **2018**. – Vol. 335. – P. 204–210.

[31] An overview of oil–water separation using gas flotation systems / Jayaprakash Saththasivam, Kavithaa Loganathan, Sarper Sarp // Chemosphere. – **2016**. – Vol. 144. – P. 671–680.

[32] K.A. Matis, P. Mavros, Recovery of metals by ion flotation from dilute aqueous solutions, Sep Purif Methods 20 (**1991**) 1-48.

[33] J. Saththasivam, K. Loganathan, S. Sarp, An overview of oil-water separation using gas flotation systems, Chemosphere 144 (**2016**) 671-680.

[34] Gas entrainment by plunging liquid jets / Andrzej K. Bińi // Chemical Engineering Science. – **1993**. – Vol. 48, Issue 21. – P. 3585–3630.

[35] T. Tasdemir, B. Oteyaka, A. Tasdemir, Air entrainment rate and holdup in the Jameson cell, Miner Eng 20 (**2007**) 761-765.

[36] J. Jameson, E. Manlapig, Applications of the Jameson flotation cell, 91-Proceedings of the International Conference on Column Flotation Sudbury, Ontario,**1991**.

[37] R. Clayton, G.J. Jameson, E.V. Manlapig, The development and application of the Jameson cell, Miner Eng 4 (**1991**) 925-933.

[38] L.K. Wang, N.K. Shammas, W.A. Selke, D.B. Aulenbach, Flotation technology, handbook of environmental engineering, Heidelberg, London, Humana, **2014**.

[39] N.R.H. Rao, R.Yap, M. Whittaker, R. M. Stuetz, B. Jefferson, W.L. Peirson, A. M. Granville, R.K. Henderson, The role of algal organic matter in the separation of algae and cyanobacteria using the novel "Posi" - Dissolved air flotation process, Water Res 130 (**2018**) 20-30.

[40] J.K. Edzwald, Dissolved air flotation and me, Water Res 44 (**2010**) 2077-2106.

[41] M.R.A. Radzuan, M.A.A.B. Belope, R. Thorpe, Removal of fine oil droplets from oil-in-water mixtures by dissolved air flotation, Chem Eng Res Des 115 (**2016**) 19-33.

[42] I.D.O.D. Mota, J.A.D Castro, R.D.G. Casqueira, A.G.D.O Junior, Study of electroflotation method for treatment of wastewater from washing soil contaminated by heavy metals, J Mater Res Technol 4 (**2015**) 109-113.

[43] Electroflotation process: A review / George Z. Kyzas, Kostas A. Matis // Journal of Molecular Liquids. – 2016. – Vol. 220. – P. 657–664.

[44] N.K. Lazaridis, E.N. Peleka, T.D. Karapantsios, K.A. Matis, Copper recovery from effluents by various separation techniques, Hydrometallurgy, 74 (**2004**) 149-156.

[45] E.N. Peleka, M.M. Fanidou, P.P. Mavros, K.A. Matis, A hybrid flotation-microfiltration cell for solid/liquid separation: operational characteristics, Desalination, 194 (2006) 135-145.

[46] K.A. Matis, N.K. Lazaridis, A.I. Zouboulis, G.P. Gallios, V. Mavrov, A hybrid flotation - Microfiltration process for metal ions recovery, J. Membr. Sci., 247 (**2005**) 29-35.

[47] Rodionov, A. I. Tehnika zashhityokruzhajushhejsredy: uchebnik / A. I. Rodionov, V. N. Klushin, N. S. Torocheshnikov. – 2-e izd., pererab. i dop. – M. : Himija, **1989**. – 511s.

[48] Proskurjakov, V. A. Ochistka stochnyh vod v himicheskoj promyshlennosti / V. A. Proskurjakov, L. I. Shmidt. – L. : Himija, 1977. 463s.

[49] Teorija i tehnologija flotacii rud / O. S. Bogdanov [i dr.] ; pod obshh. red. O. S. Bogdanova. – 2-e izd., pererab. i dop. – M. : Nedra, 1990. – 362 s.

[50] Klassen, V. I. Vvedenie v teoriju flotacii / V. I. Klassen, V. A. Mokrousov. – Izd. 2-e, dop.i chastich. pererab. V. I. Klassenom. – M. : Gosgortehizdat, **1959**. – 636 s.

[51] M.S.K.A. Sarkar, G.M. Evans, S.W. Donne, Bubble size measurement in electroflotation, Miner Eng 23 (**2010**) 1058-1065.

[52] L.G.V. Gonzales, G.A.H. Pino, M.L. Torem, Electroflotation of cassiterite fines using a hydrophobic bacterium strain, Rev Esc Minas 66 (**2013**) 507-512.

[53] Matov, B. M. Jelektroflotacija: novoe v ochistke zhidkostej / B. M. Matov. – Kishinev : Kartja moldovenjaskje, **1971**. – 184s.

[54] Mamakov, A. A. Sovremennoe sostojanie i perspektivy primenenija jelektroliticheskoj flotacii veshhestv : v 2 ch. / A. A. Mamakov. – Kishinev : Shtiinca, **1975**. – Ch.2. – 184s.

[55] Matov, B. M. Jelektroflotacionnaja ochistkastochnyh vod / B. M. Matov. – Kishinev : Kartja moldovenjaskje, **1982**. – 170s.

[56] Matov, B. M. Flotacija v pishhevoj promyshlennosti / B. M. Matov. – M.: Pishhevaja prom-st', **1976**. – 168s.

[57] Level control of cascade coupled flotation tanks / Benny Stenlund, Alexander Medvedev // Control Engineering Practice. – **2002**. – Vol. 10, Issue 4. – P. 443–448.

[58] Zipperian, D. E. Plant operation of the Deister Flotaire Column Flotation Cell [Electronic resource] / D. E. Zipperian // OneMine.org. – Mode of access: http://www.onemine.org/document/abstract.cfm?docid=176812&title=Plant-Operation-Of-The-Deister-Flotaire-Column-Flotation-Cell. – Date of access: 12.05.2018.

[59] Air flotation cell [Electronic resource] : pat. US 4450072 A / J. C. Suplicki. – Publ. date 22.05.1984. – Mode of access: https: //www.google.com/patents/US4450072.– Date of access: 12.05.2018.

[60] Apparatus for mineral separation by froth flotation [Electronic resource] : Europ. pat. applic. № 208411 / D. E. Zipperian. – Publ. date 14.01.**1987**. – Mode of access: http://patentimages.storage.googleapis.com/.../EP0208411A2.pdf. – Date of access: 12.05.2018.

[61] Flotation separating system [Electronic resource] : pat. US 4617113 A / J. A. Christophersen, F. J. Marquardt. – Publ. date 14.10.1986. – Mode of access: https://www.google.com/patents/US4617113. – Date of access: 12.05.2018.

[62] Kolonnaja flotacionnaja mashina : a. c. SSSR 368883 / S. I. Mitrofanov, M. Ja. Ryskin, B. S. Chertilin, V. D. Samygin, P. T. Mihajlov, V. N. Vozovikov, M. V. Strel'nikov, Je. N. Gluhov. – Opubl. 08.02.1973

[63] Kolonnaja flotacionnajamashina : a. s. SSSR 545385 / S. I. Mitrofanov, M. Ja. Ryskin, I. A. Enbaev, A. Je. Bagat, V. P. Kornev, G. Z. Koreshkov, G.I.Daurov, V. S. Valjakin. – Opubl. 05.02.1977.

[64] Kolonnaja flotomashina : a.c. SSSR 472692 / P. A., Grebnev, V. G. Zajcev, A. M. Shipicin. – Opubl. 05.06.1975.

[65] Pnevmaticheskaja flotacionnaja mashina : a. c. SSSR 419255 / V.I. Tjurnikova, Ju. B. Rubinshtejn, I. N. Dymko, B. S. Chertilin, M. E. Naumov, P.V. Korsak, V. A. Cherepanin. – Opubl. 15.03.1974.

[66] Pnevmaticheskaja protivotochnaja flotacionnaja mashina : a.c. SSSR 478616 / I. N. Dymko, Ju. B. Rubinshtejn, V. I. Tjurnikova, L. P. Aleksandrov, N. S. Nikitin, V. A. Ostryj, E. G. Treskov, N. G. Zheglova, L. I. Rasputina. – Opubl. 30.07.1975.

[67] Flotacionnaja pnevmaticheskaja mashina : a. c. SSSR 1118413 / V.M.Ioffe, S. B. Polonskij, Ju. B. Rubinshtejn, S. B. Leonov, V. G. Usenko. – Opubl. 15.10.1984.

[68] Ustrojstvo dlja kolonnoj flotacii : a. s. SSSR 271446 / V. I.Tjurnikova, Ju. B. Rubinshtejn, T. I. Mechurlishvili, V. M. Bogomolov. – Opubl. 12.02.1971.

[69] Pnevmaticheskaja flotacionnaja mashina : a. s. 489530 / V. M. Ioffe, S. B. Polonskij, S. B. Leonov, Ju. B. Rubinshtejn. – Opubl. 07.08.1986.

[70] Pnevmaticheskaja protivotochnajaflotacionnaja mashina : a.c. SSSR 478615 / I. N. Dymko, V. I. Tjurnikova, V.M. Bogomolov, B. I. Linev, Ju. B. Rubinshtejn, M. E. Naumov, Ju. A. Filippov.– Opubl. 30.07.1975.

[71] Protivotochnaja flotacionnaja mashina : a.c. SSSR 440161 / V.M. Ioffe, S. B, Polonskij, S. B. Leonov, Ju. B. Rubinshtejn. – Opubl. 23.07.1986.

[72] Pnevmaticheskaja flotacionnaja mashina : a.c. SSSR 984498 / G. V. Zhivankov, G. A. Zaharova, M. N. Zlobin, V. I. Melik-Gajka, G. P. Permjakov, N.A.Chuprova, N. G. Markov, Ju. M. Filippov. – Opubl. 30.12.1982.

[73] Flotacionnaja pnevmaticheskajamashina : a. c. SSSR 867423 / S. I. Chernyh, S. I. Mitrofanov, A. I. Kaharov, V. I. Rakitskij. – Opubl. 30.09.1981.

[74] Ustrojstvo dlja flotacionnoj ochistki stochnoj vody : a.s. № 722587/ V. P. Sokolov, V. A. Gustov, L. A. Chikunova. – Opubl. 25.03.1980.

[75] Kolonnaja flotacionnaja mashina : a. s. SSSR 451466 / V. P. Porubaev, I. P. Dubchev, G. G. Jashanov, V. N. Shevchenko. – Opubl. 30.11.1974.

[76] Apparatus and method for continuous froth flotation [Electronic resource] : pat. US 4066540 A / Shinji Wada, Yoshiaki Matsunaga, Michihiro Noda. – Publ. date 03.01.1978. – Mode of access: http://www.google.sr/patents/US4066540. – Date of access: 12.05.2018.

[77] Method and apparatus for separating substances from liquids by flotation using bubbles [Electronic resource] : pat. US 4186087 A / Yoshishige Kato. – Publ. date 29.01.1980. – Mode of access: http: //www.google.ch/patents/US4186087. – Date of access: 12.05.2018.

[78] Pnevmaticheskaja flotacionnaja kolonna : a. s. SSSR 440160 / L. A. Barskij, Je. G. Machehina, T. I. Mechurchlishvili. – Opubl. 25.08.1974.

[79] Concentration of minerals by flotation apparatus [Electronic resource] : pat.US 4431531 A / C. A. Hollingsworth. – Publ. date 14.02.1984. – Mode of access: https://www.google.ch/patents/US4431531. – Date of access: 12.05.2018.

[80] Column froth flotation [Electronic resource] : pat. US 4592834 A / D.C. Yang. – Publ. date 03.06.1986. – Mode of access: https: //www.google.com/patents/US4592834. – Date of access: 12.05.2018.

[81] P.S.R. Reddy, S.G. Kumar, K.K. Bhattacharyya, S.R.S. Sastri, K.S. Narasimhan, Flotation column for fine coal benefication, Int J Miner Process 24 (1988) 161-172.

Е.В. Опимах[1], А.Э. Левданский[1], А.А. Волненко[2], Д.К. Жумадуллаев[2]

[1] Белорусский государственный технологический университет, г.Минск, Беларусь
[2]М.Әуезов атындағы Оңтүстік Қазақстан мемлекеттік университеті, Шымкент, Қазақстан

ФЛОТАЦИЯЛЫҚПРОЦЕССТЕРДІЖҮРГІЗУӘДІСТЕРІ

Аннотация. Флотация арқылы полимерлік қалдықтарды бөліп шығару бойынша жұмыстардың шеңберінде флотациялық үрдістерді және қолданылатын жабдықты жүргізу әдістеріне шолу жасалды. Нысандар, фазааралық шекара, флотаторлардың конструктивті белгілері, аэрациялау тәсілдері, технологиялық тағайындалулары бойынша қолданыстағы флотациялау процесстерінің классификациялық сұлбасы қарастырылды және оларға тән барлық белгілерді есепке алынып талданды.

Жүргізілген талдаудан кейін флотация процестерін келесі типтер бойынша жіктеу ұсынылады: бағалы (мақсатты) компонентті алу бойынша, шикізат түрі бойынша, құрылғылардың түрі бойынша, аппараттардағы процестің бойынша, фазааралық беттер бойынша. Фазаларды беттік бойымен бөлумен флотационды бөлу әдістерінің ішінде көбікті флотация өнеркәсіпте кеңінен ұсынылған. Газды сұйықтыққа беру тәсілі бойынша флотация пневматикалық, пневмомеханикалық, каскадты, эжекторлы, вакуумды, қысымды, электрофлотациялық, реагентті және термиялық болып бөлінеді.

Флотациялық аппараттар типі бойынша жіктелу (тік сызық), камералы (каскад), баған (шанда) бойынша ұсынылады.

Белгілі бір тапсырма үшін флотацияның ең қолайлы әдісін таңдағанда, флотацияның барлық түрлерін ескеріп, әрқайсысының ерекшеліктерін, артықшылықтарын және кемшіліктерін білу қажет. Флотациялық әдістерді жіктеудің ұсынылған сұлбасы қолданыстағы флотация процестерінің көпшілігін жүйелеуге және сипаттауға мүмкіндік береді.

Түйін сөздер: флотация, классификация, шикізат, концентрат, мақсатты компонент, процесс тәртібі, фазааралық бет, аэрация, жабдық.

УДК 502.174.1

Е.В. Опимах[1], А.Э. Левданский[1], А.А. Волненко[2], Д.К. Жумадуллаев[2]

[1] Белорусский государственный технологический университет, г.Минск, Беларусь;
[2]Южно-Казахстанский государственный университет им.М.Ауэзова, г.Шымкент, Казахстан

МЕТОДЫ ПРОВЕДЕНИЯ ФЛОТАЦИОННЫХ ПРОЦЕССОВ

Аннотация. В рамках проведения работы по разделению полимерных отходов методом флотации проведен обзор методов проведения флотационных процессов и применяемого оборудования. Рассмотрены существующие схемы классификации процессов флотации по объектам, межфазным границам, конструктивным признакам флотаторов, способу аэрации, технологическому назначениюи выполнен анализ полноты учета всех характерных признаков.

Исходя из проведенного анализа, предложена классификация процессов флотации по следующим типам: по извлечению ценного (целевого) компонента, по виду сырья, по типу устройств, по режиму процесса в аппарате, по межфазным поверхностям. Среди методов флотационного разделения на поверхностях раздела фазпенная флотация наиболее широко представлена в промышленности.По способу подачи газа в жидкость флотация подразделяется на пневматическую, пневмомеханическую, каскадную, эжекторную, вакуумную, напорную, электрофлотацию, реагентную и термическую.

Флотационные аппараты предложено также классифицировать по типу накорытные (прямоточные),камерные (каскадные),колонные (чановые).

При выборе наиболее подходящего способа флотации для той или иной задачи необходимо учитывать все типы флотации и знать особенности, достоинства и недостатки каждого из них. Предлагаемая схемаклассификации методов флотации позволяет полностью систематизировать и охарактеризовать большинство существующих процессов флотации.

Ключевые слова: флотация, классификация, сырье, концентрат, целевой компонент, режим процесса, межфазная поверхность, аэрация, оборудование.

Information about authors:

Apimakh Yauheni Vladimirovich - Candidate of Technical Sciencesteacher of the Department "Processes and Apparatuses of Chemical Production", Belorussian State Technological University, e-mail: alex_levdansky@mail.ru;

Leudanski Aliaksandr Eduardovich - Doctor of Technical Sciences, Associate Professor of the Department "Processes and Apparatuses of Chemical Production", Belorussian State Technological University, e-mail: alex_levdansky@mail.ru;

Volnenko Alexandr Anatol'evich - Doctor of Technical Sciences, Professor of the Department of Technological Machines and Equipment, M.Auezov South Kazakhstan State University, e-mail: nii_mm@mail.ru;

Zhumadullayev Daulet Koshkarovich - master, teacherof the Department of Technological Machines and Equipment, M.Auezov South Kazakhstan State University, e-mail: nii_mm@mail.ru.

МАЗМҰНЫ

СОДЕРЖАНИЕ

CONTENTS

Publication Ethics and Publication Malpractice in the journals of the National Academy of Sciences of the Republic of Kazakhstan

For information on Ethics in publishing and Ethical guidelines for journal publication see http://www.elsevier.com/publishingethics and http://www.elsevier.com/journal-authors/ethics.

Submission of an article to the National Academy of Sciences of the Republic of Kazakhstan implies that the described work has not been published previously (except in the form of an abstract or as part of a published lecture or academic thesis or as an electronic preprint, see http://www.elsevier.com/postingpolicy), that it is not under consideration for publication elsewhere, that its publication is approved by all authors and tacitly or explicitly by the responsible authorities where the work was carried out, and that, if accepted, it will not be published elsewhere in the same form, in English or in any other language, including electronically without the written consent of the copyright-holder. In particular, translations into English of papers already published in another language are not accepted.

No other forms of scientific misconduct are allowed, such as plagiarism, falsification, fraudulent data, incorrect interpretation of other works, incorrect citations, etc. The National Academy of Sciences of the Republic of Kazakhstan follows the Code of Conduct of the Committee on Publication Ethics (COPE), and follows the COPE Flowcharts for Resolving Cases of Suspected Misconduct (http://publicationethics.org/files/u2/New_Code.pdf). To verify originality, your article may be checked by the Cross Check originality detection service http://www.elsevier.com/editors/plagdetect.

The authors are obliged to participate in peer review process and be ready to provide corrections, clarifications, retractions and apologies when needed. All authors of a paper should have significantly contributed to the research.

The reviewers should provide objective judgments and should point out relevant published works which are not yet cited. Reviewed articles should be treated confidentially. The reviewers will be chosen in such a way that there is no conflict of interests with respect to the research, the authors and/or the research funders.

The editors have complete responsibility and authority to reject or accept a paper, and they will only accept a paper when reasonably certain. They will preserve anonymity of reviewers and promote publication of corrections, clarifications, retractions and apologies when needed. The acceptance of a paper automatically implies the copyright transfer to the National Academy of Sciences of the Republic of Kazakhstan.

The Editorial Board of the National Academy of Sciences of the Republic of Kazakhstan will monitor and safeguard publishing ethics.

Правила оформления статьи для публикации
в журнале смотреть на сайте:

www:nauka-nanrk.kz

http://www.chemistry-technology.kz/index.php/ru/

ISSN 2518-1491 (Online), ISSN 2224-5286 (Print)

Редакторы: *М. С. Ахметова, Т. А. Апендиев, Аленов Д.С.*
Верстка на компьютере *А.М. Кульгинбаевой*

Подписано в печать 11.10.2018.
Формат 60x881/8. Бумага офсетная. Печать – ризограф.
9,8 п.л. Тираж 300. Заказ 5.

Национальная академия наук РК
050010, Алматы, ул. Шевченко, 28, т. 272-13-18, 272-13-19